


Measurement made to measure

Get yourself a special offer now

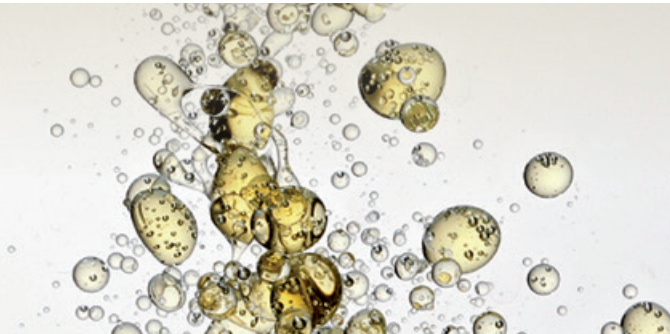

Switch to reliability and security at this point

Handling and storage with the Visco.Fix system



50 years of experience and continuous dialog with our customers – the basis for the Visco.Fix system.

Your everyday life: glass breakage of your sensitive Ubbelohde capillary.
Our solution: Visco.Fix – makes work reliable, clean and safe:

Reliable

- || Even in the hectic daily laboratory routine – our capillaries with Visco.Fix are effectively protected.
- || Significantly longer lifetime due to made-to-last design
- || Higher precision due to longer use of the same capillary
- || Always the right capillary at hand with the Visco.Fix carousel

Clean

- || Easy cleaning with individual beakers
- || For clean and safe draining and drying
- || No more dust inside your capillaries

Safe

- || No more glass breakage in the tempering bath
- || Robust in handling and transport
- || Convenient storage in newly developed packaging


Switch now:

Visco.Fix package **4+1**
2x EGVH 703
2x EGVH 704
1x carousel

The right capillary for every application

Standard-compliant Ubbelohde and Micro-Ubbelohde capillary tube

- || For viscosities from 0.3 mm/s to 30,000 mm/s
- || Also available as dilution capillary or for automatic cleaning
- || With calibration certificate
- || Durable ring marks and serial numbers

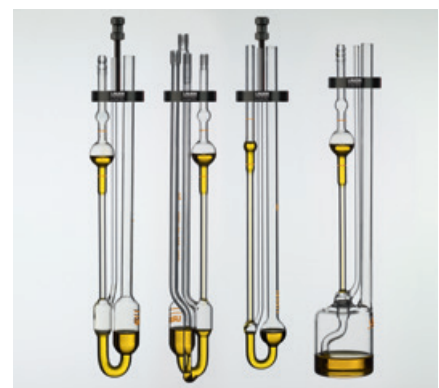

iVisc – Automatic Viscosity Measurement

Your stop watch may take a break



Simple, automatic viscosity determination with the compact iVisc – ideal for switching to personal-independent, GLP-compliant measurement. Simply connect the USB cable, insert a capillary, start the software and your capillary viscometer is ready for operation.

iVisc – compatible with all common capillaries (Ubbelohde, Cannon-Fenske, Micro-Ubbelohde and many more).

iVisc Capillary Viscometer

- || Automatic repeating measurement
- || Non-operator dependent measurement
- || High reproducibility
- || Precise and accurate optical meniscus scanning
- || Intuitive user guidance by software
- || "Plug & Play" device installation
- || Connect up to two iVisc per computer
- || Measuring temperature from -20 to 150 °C (also depending on tempering bath)

Or would you like a little bit more?

Get more information now at info@lauda-scientific.de or by phone



LAUDA Scientific – Your partner with a wide range of capillaries, measuring stands, thermostats, cleaning modules and much more all around viscosity measurement.